


AIRLED 32-DK

Product Specifications/Ürün Özellikleri

Product Name	: Airled-32 DK
Dimension	: H12 /W28 mm
PCB Increment	: Power Connection and cut point every 50 mm
LED pitch	: 8 mm
Chip	: Samsung
Beam Angle	: 180°
Colours	: White
Bin/Step	: 3 step Macadam ellipse
CRI	: 85
Lifetime	: 50.000 hours
Operating Temp.	: -40°+. +200
IP Rating	: IP68
Mounting	: Nötr Silicon
Minumum bend radius	: 100 mm
Connection	: Hardwire tails or male/famale connectors
Control	: 0-10/DMX/DALI
Case Type	: Flexible Silicon Case

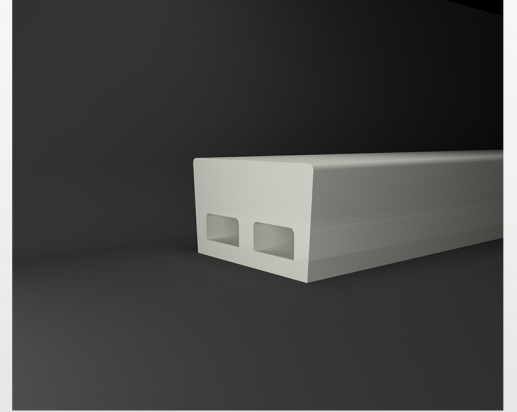

Performance Data/ Performans Verileri (for 1000mm)

Power consumption	: 19.2 W
Supply voltage	: 24 V DC
Supply current	: 0.8 A
Lumious flux	: 1532 Lm


Color Characteristics / Renk Özellikleri

Correlated Color Temperatur (CCT)	4000 K
Colour rendering index (CRI,RA)	85
Chromatic Coordinates	0.8 A

Light Output/ Işık Çıkışı

Total Light output (Lumens)	1532
Luminaire efficacy (lm/W)	85.13
Beam angle	180°

Tecnical Drawing/ Teknik Çizim

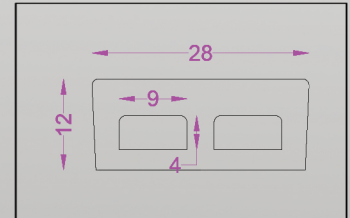

Product and Power Options

Product Name/Number of LEDs	Max Lenght (m)	Light Color	Voltage(V)	Power (W/mt)	Luminous Flux (lm/m)	Weight (mt/gr)
32DK/126LED	100 m	WW	24V DC	19.2	1445	580
32DK/126LED	100 m	NW	24V DC	19.2	1532	580
32DK/126LED	100 m	CW	24V DC	19.2	1503	580

Red Green Blue Amber

WW; Warm White 3000K
NW; Natural White 4000K
CW; Cold White 6500K

